

DSE8710

REAR MOUNTED SYNCHRONISING AUTO START LOAD SHARE CONTROL MODULE

Used in conjunction with DSE remote displays

FEATURES



The DSE8710 is an easy to use Synchronising Auto Start Control Module suitable for use in a multi-generator loadshare system, designed to synchronise up to 32 generators including electronic and non-electronic engines.

The DSE8710 monitors the generator and indicates operational status and fault conditions, automatically starting or stopping the engine on load demand or fault condition.

The modules are designed to work with independent front display screens which are connected via a data link up to a maximum distance of 1 km. These must be ordered as a separate item.

System alarms are annunciated on the LCD screen (multiple language options available), illuminated LED and audible sounder.

The event log will record 250 events to facilitate easy maintenance. An extensive number of fixed and flexible monitoring, metering and protection features are included as well as comprehensive communication and system expansion options.

Using the DSE PC Configuration Suite Software allows easy adjustment of the operational sequences, timers and alarms. With all communication ports capable of being active at the same time, the DSE8710 is ideal for a wide variety of demanding load share applications.

KEY LOAD SHARE FEATURES:

- Peak lopping/sharing (with DSE8x60)
- Sequential set start
- Manual voltage/frequency adjustment
- R.O.C.O.F. and vector shift protection
- Generator load demand
- Automatic hours run balancing
- Mains (Utility) de-coupling
- Mains (Utility) de-coupling test mode
- Dead bus sensing
- Bus failure detection
- Direct governor and AVR control
- Volts and frequency matching
- kW and kV Ar load sharing
- Dead bus synchronising

ENVIRONMENTAL TESTING STANDARDS

ELECTRO MAGNETIC COMPATIBILITY

BS EN 61000-6-2
EMC Generic Immunity Standard for the Industrial Environment
BS EN 61000-6-4
EMC Generic Emission Standard for the Industrial Environment

ELECTRICAL SAFETY

BS EN 60950
Safety of Information Technology Equipment, including Electrical Business Equipment

TEMPERATURE

BS EN 60068
Ab/Ae Cold Test -30 °C
BS EN 60068-2-2
Bb/Be Dry Heat +70 °C

VIBRATION

BS EN 60068-2-6
Ten sweeps in each of three major axes
5 Hz to 8 Hz at +/-7.5 mm, 8 Hz to 500 Hz at 2 GN

HUMIDITY

BS EN 60068-2-30
Dd Damp Heat Cyclic 20/55 °C at 95% RH
48 Hours
BS EN 60068-2-78
Cab Damp Heat Static 40 °C at 93% RH
48 Hours


SHOCK

BS EN 60068-2-27
Three shocks in each of three major axes
15 GN in 11mS

DEGREES OF PROTECTION PROVIDED BY ENCLOSURES

BS EN 60529
IP65 - Front of module when installed into the control panel with the supplied sealing gasket.

COMPREHENSIVE FEATURE LIST TO SUIT A WIDE VARIETY OF LOAD SHARE APPLICATIONS

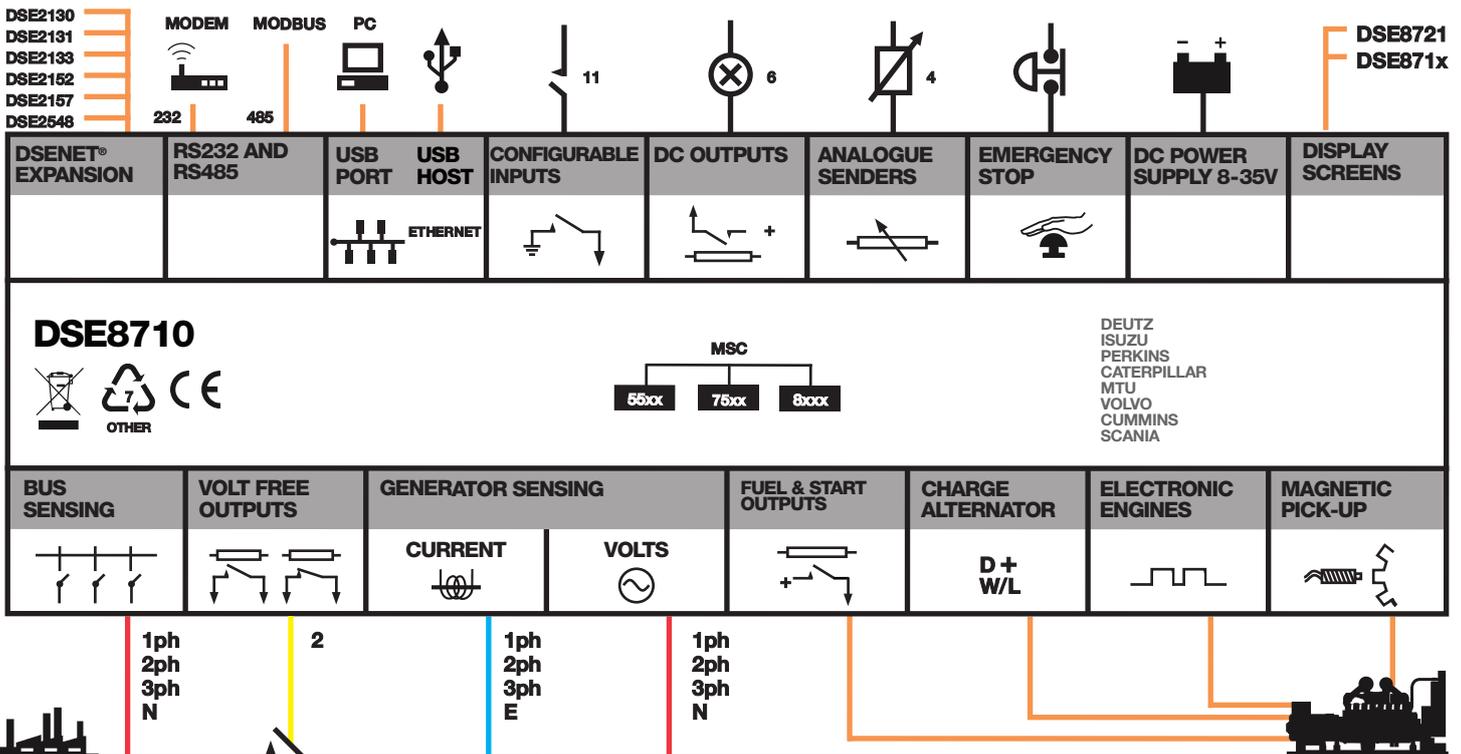


DSE8710

REAR MOUNTED SYNCHRONISING AUTO START LOAD SHARE CONTROL MODULE

Used in conjunction with DSE remote displays

FEATURES

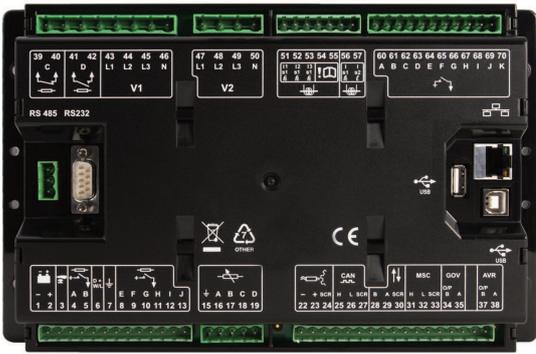

DSE8721
Colour Remote Display Module



DSE8711
Standard Remote Display Module

KEY FEATURES

- Can be set as a DSE8710 or DSE8760
- Independent display screen options
- Comprehensive synchronising & loadsharing capabilities
- Built-in governor and AVR control
- Base load (kW export) functionality
- Mains (utility) de-coupling protection
- Generator power (kW, kV Ar, kV A & pf) monitoring
- Overload (kW & kV Ar) protection
- Reverse power (kW & kV Ar) protection
- Unbalanced load protection
- Independent earth fault protection
- Advanced integral PLC editor
- 11 Configurable inputs
- 8 Configurable outputs
- Configurable flexible sensor inputs
- DSENet® expansion compatibility
- User configurable RS232, RS485 and Ethernet communications
- Remote SCADA monitoring via various DSE software applications
- MODBUS RTU & TCP support
- User configurable MODBUS pages
- Advanced SMS control and fault messaging (additional GSM modem required)
- Easy access diagnostic pages including modem diagnostic pages
- Data logging and trending
- CAN, MPU and Frequency speed sensing
- Tier 4 CAN engine support
- "Protections disabled" feature
- Front panel editing with PIN protection
- Fully configurable using DSE Configuration Suite PC software via USB
- LED and LCD alarm indication
- Configurable display languages
- USB connectivity
- Customisable status screens
- Five key menu navigation
- 3 Configurable maintenance alarms
- Multiple date and time run scheduler
- Manual fuel pump control
- Fuel usage monitor and low fuel level protection
- Charge alternator failure protection
- Load switching (load shedding and dummy load control)
- Configurable event log (250)
- Backed up real time clock

KEY BENEFITS

- Compatible in load share systems containing DSE55xx, DSE75xx and DSE8xxx series. Contact DSE for further details
- Real-time clock provides accurate event logging
- Ethernet communication, provides built in advanced remote monitoring.
- Can be integrated into building management systems (BMS) and programmable logic control (PLC)
- Increased input and output expansion capability via DSENet®
- Licence-free PC software
- IP65 rating (with supplied gasket) offers increased resistance to water ingress
- Advanced Internal PLC editor allows user configurable functions to meet specific application requirements.

EXPANSION DEVICES

- DSE124 CAN/MSC Extender
- DSE2130 Input Expansion Module
- DSE2131 Ratiometric Input Expansion Module
- DSE2133 RTD & Thermocouple Expansion Module
- DSE2152 Analogue Output Expansion Module
- DSE2157 Output Expansion Module
- DSE2548 LED Expansion Module

SPECIFICATION

DC SUPPLY

CONTINUOUS VOLTAGE RATING
8 V to 35 V continuous

CRANKING DROPOUTS

Able to survive 0 V for 50 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries

MAXIMUM OPERATING CURRENT
460 mA at 12 V, 245 mA at 24 V

MAXIMUM STANDBY CURRENT
375 mA at 12 V, 200 mA at 24 V

CHARGE FAIL/EXCITATION RANGE
0 V to 35 V

OUTPUTS

OUTPUT A (FUEL)
15 A DC at supply voltage

OUTPUT B (START)
15 A DC at supply voltage

OUTPUTS C & D
8 A AC at 250 V AC (Volt free)

AUXILIARY OUTPUTS E,F,G,H,I & J
2 A DC at supply voltage

GENERATOR & BUS

VOLTAGE RANGE
15 V to 333 V AC (L-N)

FREQUENCY RANGE
3.5 Hz to 75 Hz

MAGNETIC PICK-UP VOLTAGE RANGE
+/- 0.5 V to 70 V

FREQUENCY RANGE
10,000 Hz (max)

BUILT-IN GOVERNOR CONTROL

MINIMUM LOAD IMPEDANCE
1000Ω
Fully isolated

GAIN VOLTAGE

0 V to 10 V DC
Fully isolated

OFFSET VOLTAGE

+/- 10 V DC
Fully isolated

BUILT-IN AVR CONTROL

MINIMUM LOAD IMPEDANCE
1000Ω
Fully isolated

GAIN VOLTAGE

0 V to 10 V DC
Fully isolated

OFFSET VOLTAGE

+/- 10 V DC
Fully isolated

DIMENSIONS

OVERALL
240 mm x 172 mm x 57 mm
9.4" x 6.8" x 2.2"

OPERATING TEMPERATURE RANGE

-30 °C to +70 °C
-22 °F to +158 °F

STORAGE TEMPERATURE RANGE

-40 °C to +85 °C
-40 °F to +185 °F

RELATED MATERIALS

TITLE

DSE8721 Colour Remote Display Module Data Sheet
DSE871x Mono Remote Display Module Data Sheet
DSE8700 Installation Instructions
DSE8710 Operator Manual
DSE8700 PC Configuration Suite Manual
DSE8760 Data Sheet

PART NO'S

055-073
055-084
053-073
057-124
057-127
055-185

DEEP SEA ELECTRONICS PLC UK

Highfield House, Hunmanby Industrial Estate, Hunmanby YO14 0PH
TELEPHONE +44 (0) 1723 890099 **FACSIMILE** +44 (0) 1723 893303
EMAIL sales@deepseapl.com **WEBSITE** www.deepseapl.com

DEEP SEA ELECTRONICS INC USA

3230 Williams Avenue, Rockford, IL 61101-2668 USA
TELEPHONE +1 (815) 316 8706 **FACSIMILE** +1 (815) 316 8708
EMAIL sales@deepseausa.com **WEBSITE** www.deepseausa.com